




Activating CivilCAD with a Local License

- 1) After purchasing CivilCAD software, you will receive a Serial Number and Activation Key.
- 2) Select "I want to **activate** CivilCAD and I **have a serial number**" option and click the 'Next' button.



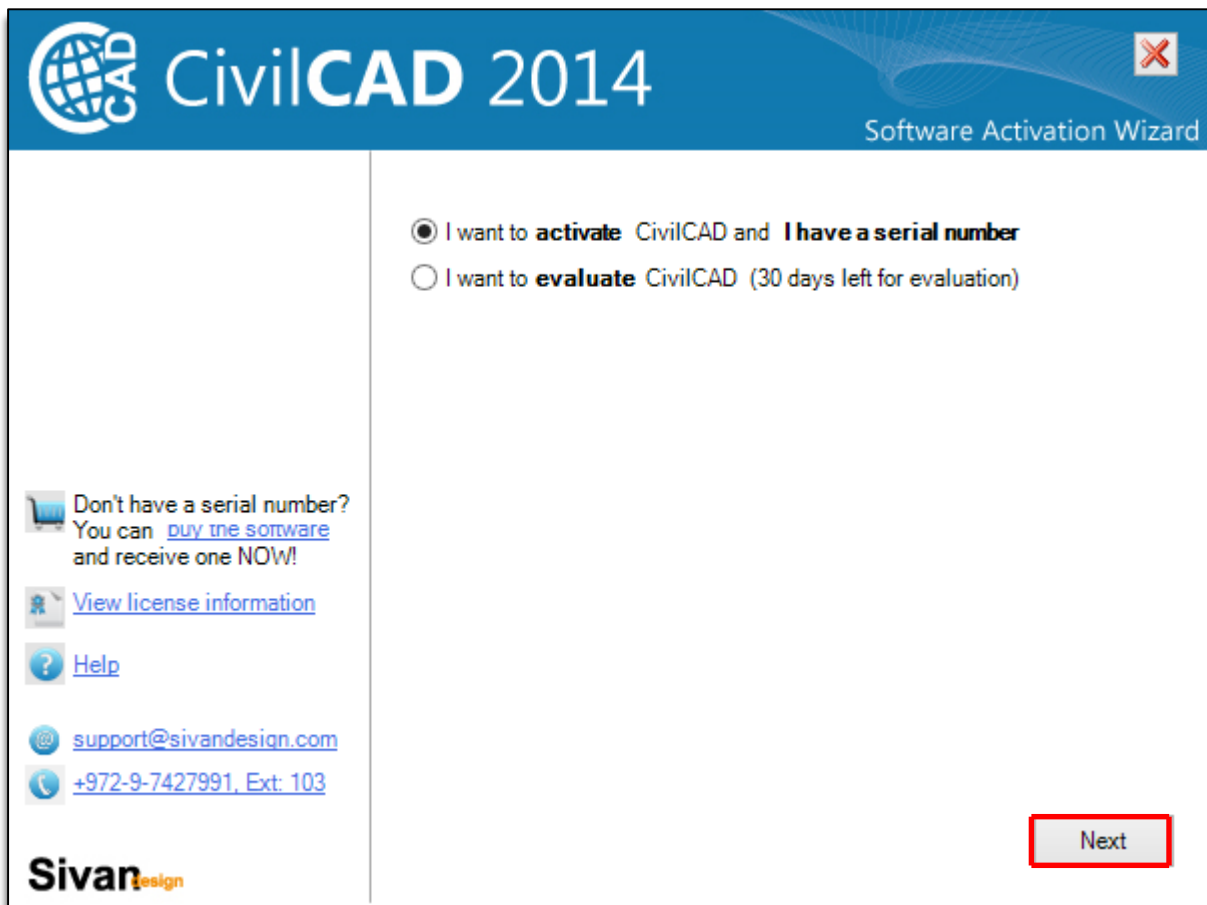

- 3) Enter your Serial Number, Activation key, Company Name, Email Address and click the 'Next' button.

CivilCAD 2014 Software Activation Wizard

Activation details

Serial number

Activation key

Company name

E-mail

[Buy CivilCAD](#)

[View license information](#)

[Help](#)

support@sivandesign.com

[+972-9-7427991, Ext. 103](tel:+972-9-7427991)

Sivan design

Back Next

- 4) 'Web Activation' window will open. Click on the 'Activate Now' button.

Web Activation


The product has to be activated online.
Please provide a connection to the internet and activate it.

[Proxy settings](#)

Activate now Cancel



- 5) Activation process will start.

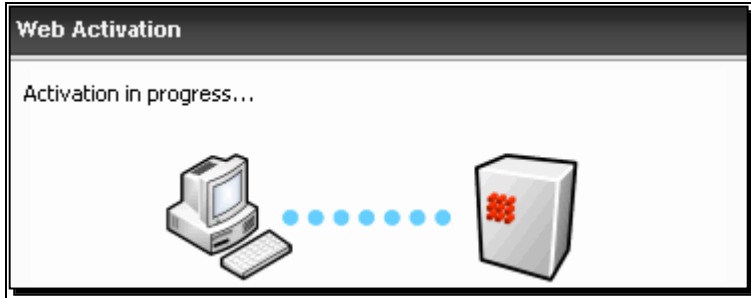


- 6) A window will open, with 'Online Activation was successful' message will appear.
Click on the 'Close' button.



- 7) When activation is finished, 'CivilCAD was successfully activated' message will appear.
Click on the 'Finish' button.










CivilCAD 2014

Software Activation Wizard

CivilCAD was successfully activated

-  [Buy CivilCAD](#)
-  [View license information](#)
-  [Help](#)
-  support@sivandesign.com
-  [+972-9-7427991, Ext: 103](tel:+972-9-7427991)

Sivandesign

[Finish](#)




Activating CivilCAD with a Local License

- 1) Install 'CivilCADLicense' application on the server.
- 2) After installation, go to the CivilCADLicense directory (default path is C:\Program Files\CivilCADLicense\) and allow Sharing and Full Permissions.
- 3) Restart the server or run the application from 'All Programs → Startup'.
- 4) The License Manager Application icon will appear in the notification area.




- 5) Right click on the 'Manager Application' icon and select 'Show License Information'.






- 6) In the License Viewer window, click on '+' of 'Installation Codes'.
- 7) Double click on 'Mac Address' (Code 02). Mac Address data will be on Clipboard.
- 8) Send it to Sivan Design Support Team by email to: support@sivandesign.com

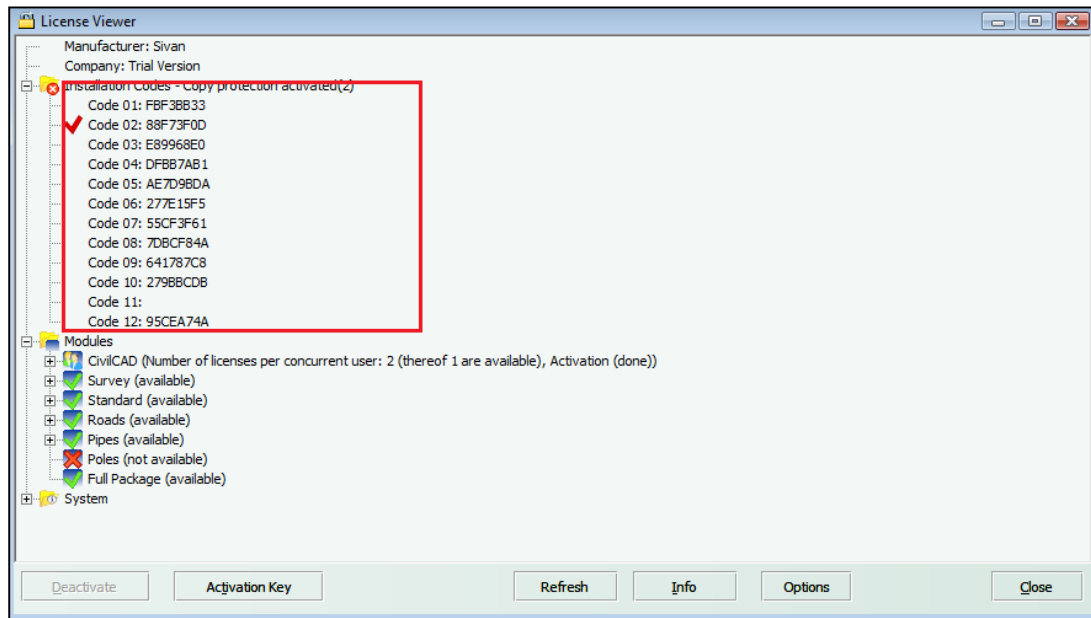


- 9) You will receive a license file by email.
- 10) Copy and replace it with the existing license file (default path is C:\Program Files\CivilCADLicense\)
- 11) Stop and restart the application from 'All Programs → Startup'.
- 12) In the working station, run CivilCAD.




13) From the CivilCAD main menu, go to 'File → License'.

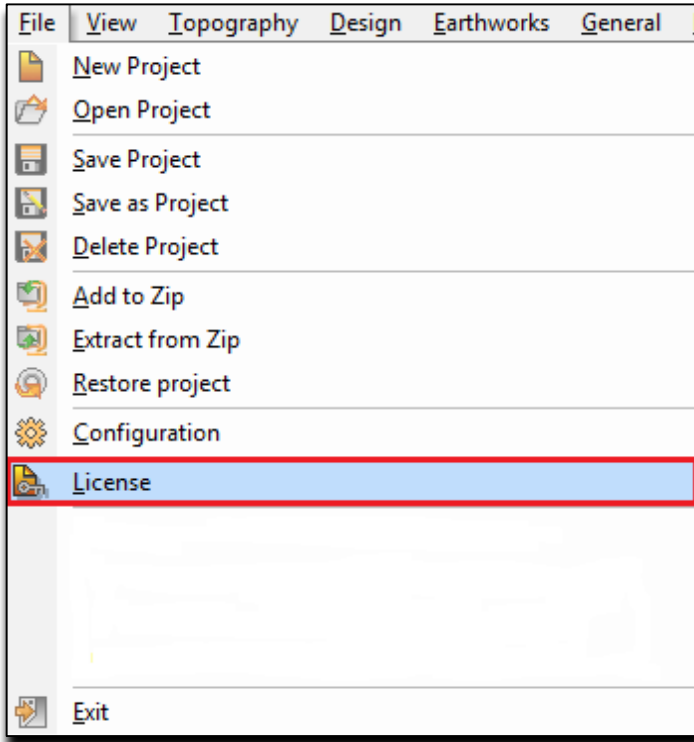



14) Select the "Network License" option, click the 'Browse' button to manually define the path to the License file or click the 'Search' button to automatically define the path to the License file and click 'OK' button.

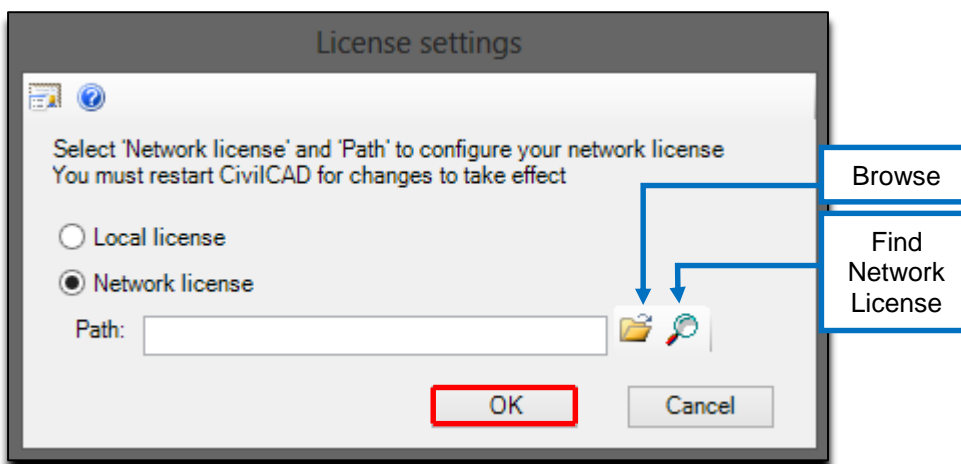



Note 1: click on the  button to view information regarding CivilCAD modules.

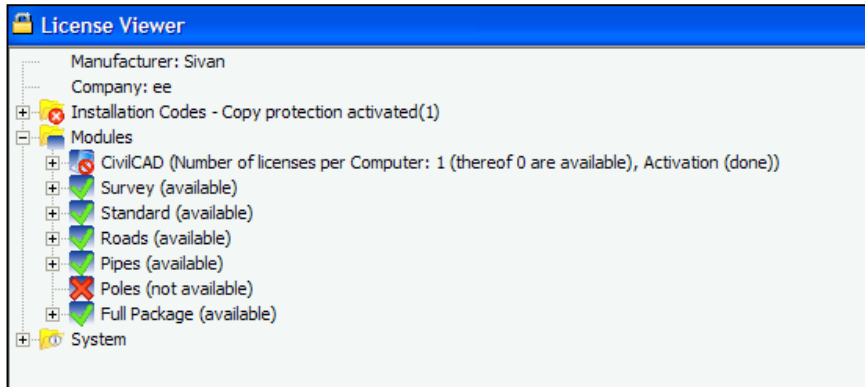

Note 2: click on the  button to open a PDF file with installation/activation instructions.

15) Repeat steps 11-14 for each working station.


Note 3: Steps 11-14 refer to activation during the trial period. After the trial period, when you run CivilCAD, a CivilCAD activation window will open.

Note 4: In a case with several modules, e.g. 3 modules of 'Full Package, 2 modules of 'Roads' and 1 module of 'Standard', there will be 3 Licenses Files – one for each group of modules.

Since the name on the License files is identical - It is recommended to locate each License File in a different folder, e.g. 'Full Package License' and at each working station, locate the relevant license by using the 'Browse' option.




16) Click on the  button.

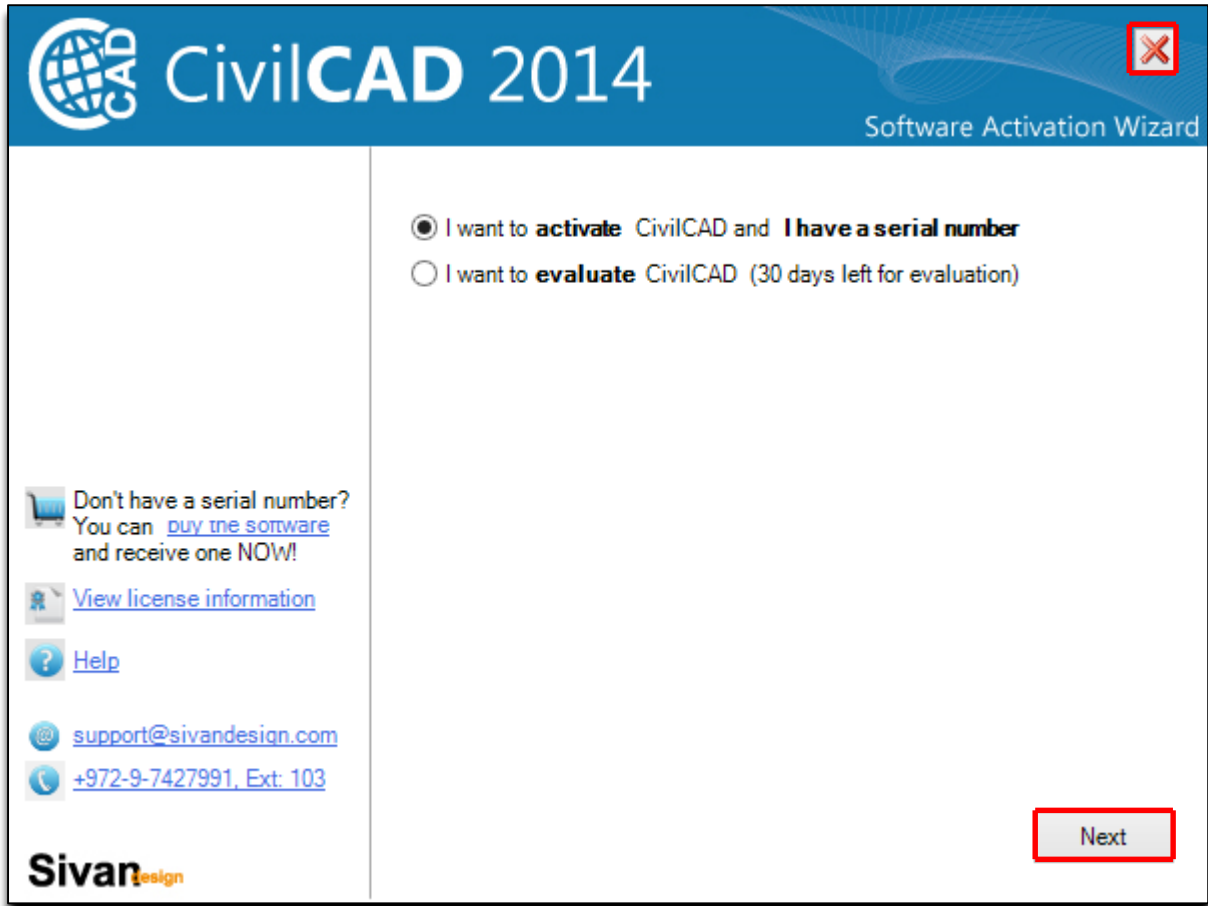



- 17) Select the "Network License" option, then click the 'Browse' button to manually define the path to the License file or click the 'Find Network License' button to automatically define the path to the License file and click 'OK' button.

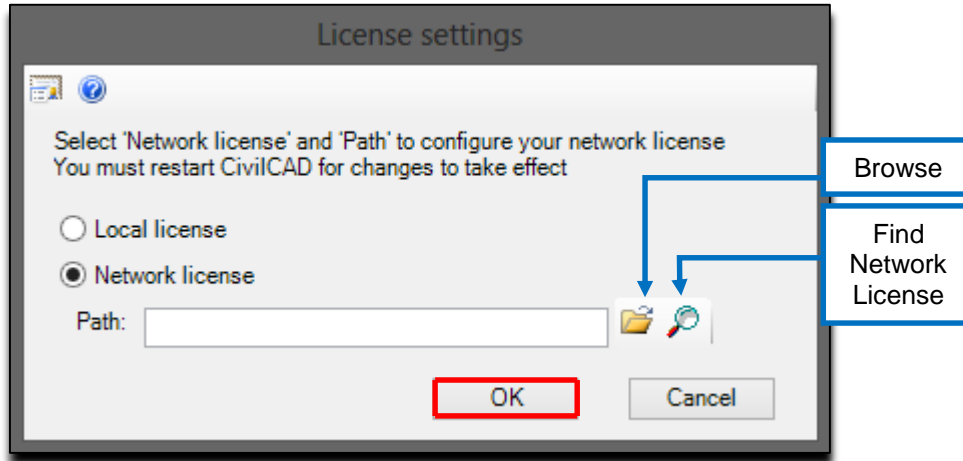

- 18) Repeat steps 16-17 for each working station.